

**Havşa Başlı Zimba / HSS - HWS**  
Precision Piercing Punch (DIN 9861 D)




**HSS / Yüksek Hız Çeliği**

Malzeme : 1.3343  
Sertlik : Gövde 60/62 HRC / Kafa 45+5 HRC  
Yüzey : sertleştirilmiş, taşlanmış.

**HWS / %12  
Krom Alaşımli Çelik**

Malzeme : 1.2080  
Sertlik : Gövde 60/62 HRC / Kafa 45+5 HRC  
Yüzey : sertleştirilmiş, taşlanmış.

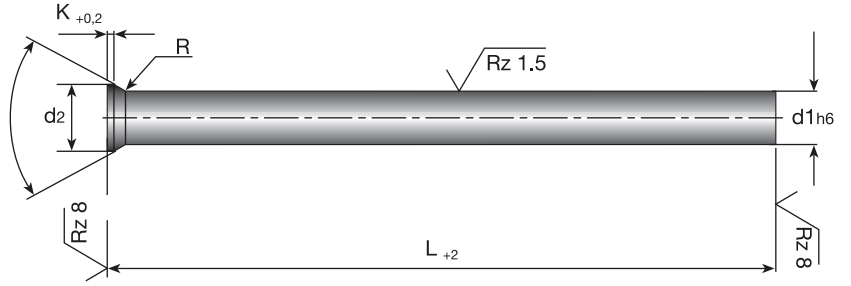

**Mevcut Ürünler**

**Sipariş Şekli : HSS / HWS d1 x L**

d1 h6	d2	K +0,2	L+2				
			71	80	100	125-130	160
0,5	0,9	0,2					
0,6	1,1						
0,7	1,3						
0,8	1,4	0,4					
0,9	1,6						
1,0/1,1	1,8	0,5					
1,2/1,3	2,0						
1,4/1,5	2,2						
1,6/1,7	2,5						
1,8/1,9	2,8						
2,0	3,0						
2,1/2,2	3,2						
2,3/2,5	3,5						
2,6/2,9	4,0						
3,0/3,4	4,5						
3,5/3,9	5,0	1,0					
4,0/4,4	5,5						
4,5/4,9	6,0						
5,0/5,4	6,5						
5,5/5,9	7,0						
6,0/6,4	8,0						
6,5/7,4	9,0						
7,5/8,4	10,0						
8,5/9,4	11,0						
9,5/10,0	12,0		1,5				
10,5/11,0	13,0						
11,5/12,0	14,0						
12,5/13,0	15,0						
13,5/14,0	16,0						
14,5/15,0	17,0						
16,0	18,0						
17,0	19,0						
18,0	20,0						
20,0	22,0						

Tabloda gösterilen mevcut ürünler HSS olarak hazırlanmıştır.

